

Specifications

Construction: Vinyl, Composite Core,
UV Coating + PVC Décor Film

Edge Type: Beveled

Overall Thickness: 7mm

Wear Layer: 0.5mm (20mil)

Length: 24"

Width: 12"

Coverage per Carton: 20.03 ft²

Pieces per Carton: 10

Weight per Carton: 34 lbs.

Installation Method: Floating

Recommended Usage: Residential &
Light Commercial

Underlayment Recommended: Yes



This product is protected by a 50
year residential/10 year light
commercial warranty



This floor is waterproof and won't be
affected by household spills

Features

- | | |
|---|--|
| <input checked="" type="checkbox"/> UV Resistant | <input checked="" type="checkbox"/> Fade Resistant |
| <input checked="" type="checkbox"/> Fire Resistant | <input checked="" type="checkbox"/> Hypoallergenic |
| <input checked="" type="checkbox"/> Scratch Resistant | <input checked="" type="checkbox"/> Non Toxic |
| <input checked="" type="checkbox"/> Slip Resistant | <input checked="" type="checkbox"/> Mildew Resistant |
| <input checked="" type="checkbox"/> Stain Resistant | <input checked="" type="checkbox"/> Easy Maintenance |


Recommended Underlayment

- **WPCEVA** 1mm Black EVA Foam with 0.1mm black PE film
- **WPCSS** 1.5mm high density black foam with 0.1mm black PE film
- **WPCZS** 1.5mm Zero Slip foam

Certifications

 <p>GREENGUARD PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS ULCOM/GG UL 2818</p>	<p>GREENGUARD Certification ensures that a product has met some of the world's most rigorous and comprehensive standards for low emissions of volatile organic compounds (VOCs) into indoor air.</p>
 <p>floor score CERTIFIED BY SCS Global Services</p>	<p>FloorScore® is the most recognized indoor air quality (IAQ) certification standard for hard surface flooring materials, adhesives, and underlayments.</p>

Accessories

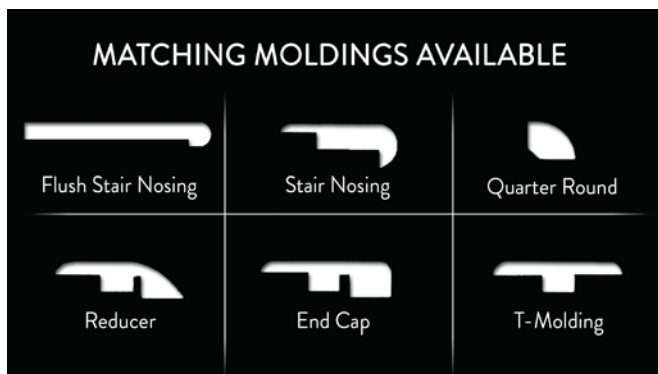

Product	Overall Thickness	7.0mm (No Pad) (2.0mm lvt+5.0wpc)		
Dimensions	Width and Length	305mmW x 610mmL		
Packaging (Per Carton)		10 Planks	20.03 Sq.Ft.	34 Lbs
Construction	Top Layers	High Definition Decor Film		
		Enhanced Polyurethane Coating		
		0.5mm Wear Layer		
	Core	5.0mm Limestone Composite: min. 45% stone, 0% wood,		
		100% Virgin Material		
	Density	1200kg/m³±10%		
	Pad	No pad		
Bevel	Bevel			
Installation	Floating Glueless			
Under Floor Heating	Approved - See installation manual for details.			
Warranty	50 Year Residential/10 Years Light Commercial			
Test Data				
Static Load	ASTM F970	500PSI		
Heat Exposure Resistance F1700	ASTM F2199 modified(70℃) EN16511 modified (70℃)	≤0.15%		
Swelling after submersion	NALFA LF 01-2011	0%		
		Class 4, Heavy Commercial		
Impact Insulation Class	ASTM E492-09	IIC Rating = 60		
Castor Chair Resistance	ISO 4918	Pass		
Fire Rating	ASTM E648/ 662	Class I		
Wear Resistance	EN 13329 method A	Class 34, Heavy Commercial		
F1700	EN 16511	Class 34, Heavy Commercial		
Impact Resistance (Big Ball)	NALFA LF01-2011 EN 16511	Class 4, Heavy Commercial IC3, Class 34, Heavy Commercial		
Impact Resistance (Small Ball)	NALFA LF01-2011	Class 4, Heavy Commercial		
Static coefficient of Friction	ASTM D2047	Dry: 0.38, Wet: 0.9		
Resistance to staining F1700	ASTM F925 NALFA LF01-2011	Pass Class 4, Heavy Commercial		
Chemical Composition				
VOC	FloorScore™	Pass		
Ortho-phthalates	Prop 65	Not Detected / In Compliance		
Lead	CPSIA	None Detected		
Substances of Very High Concern (SVHC)		Not Detected		

