

### Specifications

Construction: Rigid Core LVT

Edge Type: Beveled

Overall Thickness: 4mm

Wear Layer: 0.5mm (20mil)

Length: 60"

Width: 9"

Coverage per Carton: 22.12 ft<sup>2</sup>

Pieces per Carton: 6

Weight per Carton: 37 lbs.

Installation Method: Floating

Recommended Usage: Residential & Light Commercial

Underlayment Recommended: Yes



This product is protected by a 25 year residential/5 year light commercial warranty



This floor is waterproof and won't be affected by household spills

### Features

These luxury vinyl floors are constructed with a high density thermo-plastic composite which is extremely stable and can be installed over most subfloors. Since there are no wood fibers, these floors are 100% waterproof and can be wet mopped. The 5ft planks and natural embossing allow for an authentic wood look while the rigid core resists indentations and wear from everyday household traffic.


### Recommended Underlayment

- **WPCEVA** 1mm Black EVA Foam with 0.1mm black PE film
- **WPCSS** 1.5mm high density black foam with 0.1mm black PE film
- **WPCZS** 1.5mm Zero Slip foam

### Certifications

 <p><b>GREENGUARD</b> PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL.COM/GG UL-2818</p>	<p>GREENGUARD Certification ensures that a product has met some of the world's most rigorous and comprehensive standards for low emissions of volatile organic compounds (VOCs) into indoor air.</p>
 <p><b>floor score</b> CERTIFIED BY SCS Global Services</p>	<p>FloorScore® is the most recognized indoor air quality (IAQ) certification standard for hard surface flooring materials, adhesives, and underlayments.</p>

### Accessories

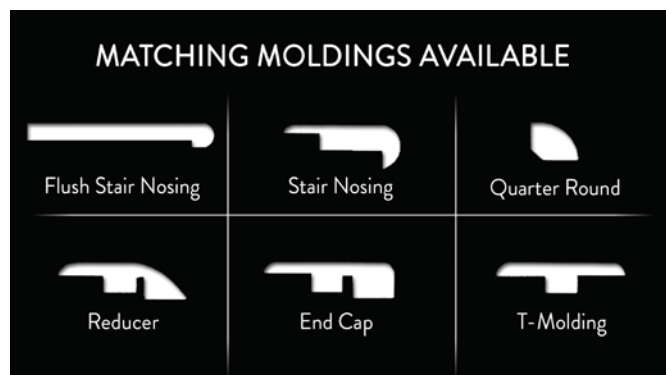

Product	Overall Thickness	4mm (No Pad)		
Dimensions	Width and Length	225mm W x 1522mmL		
Packaging (Per Carton)		6 Planks	22.12 Sq.Ft.	37 Lbs
Construction	Top Layers	High Definition Decor Film		
		Enhanced Polyurethane Coating		
		20 Mil Wear Layer		
	Core	3.7mm Limestone Composite: min. 65% stone, 0% wood, 100% Virgin Material		
	Density	1900kg/m3±10%		
	Pad	No pad		
	Bevel	beveled		
Installation	Floating Glueless			
Under Floor Heating	Approved - See installation manual for details.			
Warranty	25 years Residential/5 Years Light Commercial			
Test Data				
Static Load	ASTM F970	2000PSI		
Heat Exposure Resistance F1700	ASTM F2199 EN16511	0.05% Class 34, Heavy Commercial		
Swelling after submersion	NALFA LF 01-2011	0% Class 4, Heavy Commercial		
IIC & STC	ASTM E492 & ASTM E90	IIC= 56 / STC= 61 with 1.5mm pad: IIC=65 / STC=61		
Castor Chair	ISO 4918	Pass		
Fire Rating	ASTM E648/ 662	Class I		
Wear Resistance	EN 13329 method A	Class 33, Heavy Commercial		
Residual Indentation F1700	ASTM F1914 EN 16511	0.5% Class 34, Heavy Commercial		
Impact Resistance (Big Ball)	NALFA LF01-2011 EN 16511	Class 4, Heavy Commercial IC3, Class 34, Heavy Commercial		
Impact Resistance (Small Ball)	NALFA LF01-2011 EN 16511	Class 4, Heavy Commercial IC3, Class 34, Heavy Commercial		
Static coefficient of Friction	ASTM D2047	Dry: 0.38, Wet: 0.9		
Resistance to staining F1700	ASTM F925 NALFA LF01-2011	Pass Class 4, Heavy Commercial		
Chemical Composition				
VOC	FloorScore™	Pass		
Ortho-phthalates	Prop 65	Not Detected / In Compliance		
Lead	CPSIA	None Detected		
Substances of Very High Concern (SVHC) (Mercury, Chromium VI, Cadmium, SCCp, Benzene, Xylene, Tributyltin, etc.)		Not Detected		