

Specifications

Construction: Vinyl, Composite Core,
UV Coating + PVC Décor Film
Edge Type: Beveled
Overall Thickness: 7mm
Wear Layer: 0.5mm (20mil)
Nominal Length: 48"
Nominal Width: 8-3/4"
Coverage per Carton: 23.82 ft²
Pieces per Carton: 8
Weight per Carton: 39 lbs.
Installation Method: Floating
Recommended Usage: Residential &
Light Commercial
Underlayment Required: Yes



This product is protected by a 30 year residential/5 year light commercial warranty



This floor is waterproof and won't be affected by household spills

Features

- UV Resistant
- Fire Resistant
- Scratch Resistant
- Slip Resistant
- Stain Resistant
- Fade Resistant
- Hypoallergenic
- Non Toxic
- Mildew Resistant
- Easy Maintenance


Recommended Underlayment

- **VersaPro** 1mm Black / Green Underlayment
- **VersaPro PLUS** 1.5mm Black / Green Underlayment
- **WPCZS** 1.5mm Zero Slip High Density Black / Blue Underlayment
- **RUBBER Enhanced** 2mm Acoustical Silver / Green Underlayment

Certifications

 <p>GREENGUARD PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL.COM/GG UL 2818</p>	<p>GREENGUARD Certification ensures that a product has met some of the world's most rigorous and comprehensive standards for low emissions of volatile organic compounds (VOCs) into indoor air.</p>
 <p>floor score CERTIFIED BY SCS Global Services</p>	<p>FloorScore® is the most recognized indoor air quality (IAQ) certification standard for hard surface flooring materials, adhesives, and underlayments.</p>

Accessories

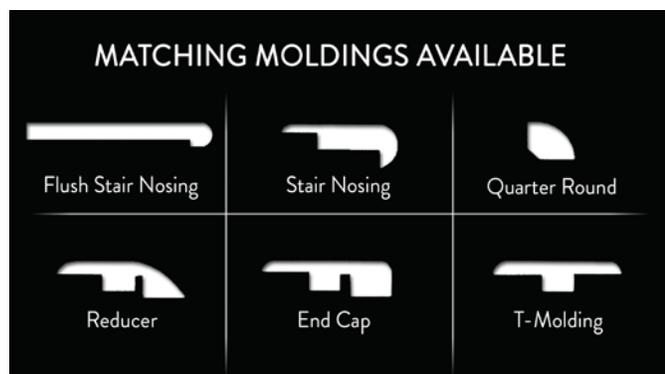

Product	Overall Thickness	7.0mm (No Pad) (2.0mm lvt+5.0wpc)		
Dimensions	Width and Length	224mmW x 1235mmL		
Packaging (Per Carton)		8 Planks	23.82 Sq.Ft.	39 Lbs
Construction	Top Layers	High Definition Decor Film		
		Enhanced Polyurethane Coating		
		0.5mm Wear Layer		
	Core	5.0mm Limestone Composite: min. 45% stone, 0% wood, 100% Virgin Material		
		Density	1200kg/m ³ ±10%	
	Pad	No pad		
Bevel	MicroBevel			
Installation	Floating Glueless			
Under Floor Heating	Approved - See installation manual for details.			
Warranty	30 years Residential/5 Years Light Commercial			
Test Data				
Static Load	ASTM F970	500PSI		
Heat Exposure Resistance F1700	ASTM F2199 modified(70°C) EN16511 modified (70°C)	≤0.15%		
Swelling after submersion	NALFA LF 01-2011	0% Class 4, Heavy Commercial		
IIC & STC	ASTM E492 / ASTM E90	IIC=55 / STC=61 With 1.5mm pad: IIC=64 / STC=61		
Castor Chair Resistance	ISO 4918	Pass		
Fire Rating	ASTM E648/ 662	Class I		
Wear Resistance F1700	EN 13329 method A EN 16511	Class 34, Heavy Commercial Class 34, Heavy Commercial		
Impact Resistance (Big Ball)	NALFA LF01-2011 EN 16511	Class 4, Heavy Commercial IC3, Class 34, Heavy Commercial		
Impact Resistance (Small Ball)	NALFA LF01-2011	Class 4, Heavy Commercial		
Static coefficient of Friction	ASTM D2047	Dry: 0.38, Wet: 0.9		
Resistance to staining F1700	ASTM F925 NALFA LF01-2011	Pass Class 4, Heavy Commercial		
VOC	FloorScore™	Pass		
Ortho-phthalates	Prop 65	Not Detected / In Compliance		
Lead	CPSIA	None Detected		
Substances of Very High Concern (SVHC)		Not Detected		