

### Specifications

Construction: Vinyl, Composite Core,  
UV Coating + PVC Décor Film

Edge Type: Beveled

Overall Thickness: 7mm

Wear Layer: 0.5mm (20mil)

Length: 60"

Width: 8-3/4"

Coverage per Carton: 21.94 ft<sup>2</sup>

Pieces per Carton: 6

Weight per Carton: 36 lbs.

Installation Method: Floating

Recommended Usage: Residential &  
Light Commercial

Underlayment Recommended: Yes



This product is protected by a 50  
year residential/10 year light  
commercial warranty



This floor is waterproof and won't be  
affected by household spills

### Features

- |   |  |
|---|--|
| <input checked="" type="checkbox"/> UV Resistant      | <input checked="" type="checkbox"/> Fade Resistant   |
| <input checked="" type="checkbox"/> Fire Resistant    | <input checked="" type="checkbox"/> Hypoallergenic   |
| <input checked="" type="checkbox"/> Scratch Resistant | <input checked="" type="checkbox"/> Non Toxic        |
| <input checked="" type="checkbox"/> Slip Resistant    | <input checked="" type="checkbox"/> Mildew Resistant |
| <input checked="" type="checkbox"/> Stain Resistant   | <input checked="" type="checkbox"/> Easy Maintenance |


### Recommended Underlayment

- **WPCEVA** 1mm Black EVA Foam with 0.1mm black PE film
- **WPCSS** 1.5mm high density black foam with 0.1mm black PE film
- **WPCZS** 1.5mm Zero Slip foam

### Certifications

	<p>GREENGUARD Certification ensures that a product has met some of the world's most rigorous and comprehensive standards for low emissions of volatile organic compounds (VOCs) into indoor air.</p>
	<p>FloorScore® is the most recognized indoor air quality (IAQ) certification standard for hard surface flooring materials, adhesives, and underlayments.</p>

### Accessories

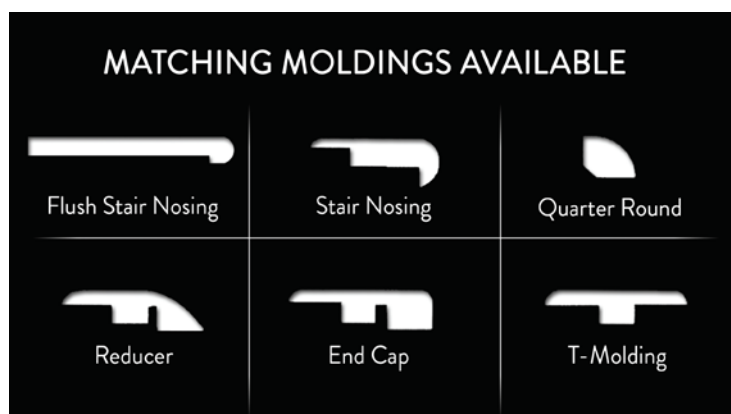

Product	Overall Thickness	7.0mm (No Pad) (2.0mm lvt+5.0wpc)		
Dimensions	Width and Length	225mm W x 1510mmL		
Packaging (Per Carton)		6 Planks	21.94 Sq.Ft.	36 Lbs
Construction	Top Layers	High Definition Decor Film		
		Enhanced Polyurethane Coating		
		0.5mm Wear Layer		
	Core	5.0mm Limestone Composite: min. 45% stone, 0% wood, 100% Virgin Material		
	Density	1200kg/m³±10%		
	Pad	No pad		
	Bevel	Bevel		
Installation	Floating Glueless			
Under Floor Heating	Approved - See installation manual for details.			
Warranty	50 Years Residential/10 Years Light Commercial			
Test Data				
Static Load	ASTM F970	500PSI		
Heat Exposure Resistance F1700	ASTM F2199 modified(70℃) EN16511 modified (70℃)	≤0.15%		
Swelling after submersion	NALFA LF 01-2011	0% Class 4, Heavy Commercial		
Impact Insulation Class	ASTM E492-09	IIC Rating = 60		
Castor Chair Resistance	ISO 4918	Pass		
Fire Rating	ASTM E648/ 662	Class I		
Wear Resistance	EN 13329 method A	Class 34, Heavy Commercial		
F1700	EN 16511	Class 34, Heavy Commercial		
Impact Resistance (Big Ball)	NALFA LF01-2011 EN 16511	Class 4, Heavy Commercial IC3, Class 34, Heavy Commercial		
Impact Resistance (Small Ball)	NALFA LF01-2011	Class 4, Heavy Commercial		
Static coefficient of Friction	ASTM D2047	Dry: 0.38, Wet: 0.9		
Resistance to staining F1700	ASTM F925 NALFA LF01-2011	Pass Class 4, Heavy Commercial		
Chemical Composition				
VOC	FloorScore™	Pass		
Ortho-phthalates	Prop 65	Not Detected / In Compliance		
Lead	CPSIA	None Detected		
Substances of Very High Concern (SVHC)		Not Detected		