

## Specifications

Construction: Rigid Core LVT

Edge Type: V-Groove

Overall Thickness: 5mm

Wear Layer: 0.5mm (20mil)

Length: 60"

Width: 9"

Coverage per Carton: 19.25 ft<sup>2</sup>

Pieces per Carton: 5

Weight per Carton: 38 lbs.

Installation Method: Floating

Recommended Usage: Residential &  
Light Commercial

Underlayment Recommended: Yes



This product is protected by a 50  
year residential/10 year light  
commercial warranty



This floor is waterproof and won't be  
affected by household spills

## Features

These luxury vinyl floors are constructed with a high density thermo- plastic composite which is extremely stable and can be installed over most subfloors. Since there are no wood fibers, these floors are 100% waterproof and can be wet mopped. The natural embossing allows for an authentic wood look while the rigid core resists indentations and wear from everyday household traffic.


## Recommended Underlayment

- **WPCEVA** 1mm Black EVA Foam with 0.1mm black PE film
- **WPCSS** 1.5mm high density black foam with 0.1mm black PE film
- **WPCZS** 1.5mm Zero Slip foam

## Technical Data

 <p>UL <b>GREENGUARD</b> PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL.COM/CG UL 2818</p>	<p>GREENGUARD Certification ensures that a product has met some of the world's most rigorous and comprehensive standards for low emissions of volatile organic compounds (VOCs) into indoor air.</p>
 <p>floor score CERTIFIED BY SCS Global Services</p>	<p>FloorScore® is the most recognized indoor air quality (IAQ) certification standard for hard surface flooring materials, adhesives, and underlayments.</p>

## Accessories

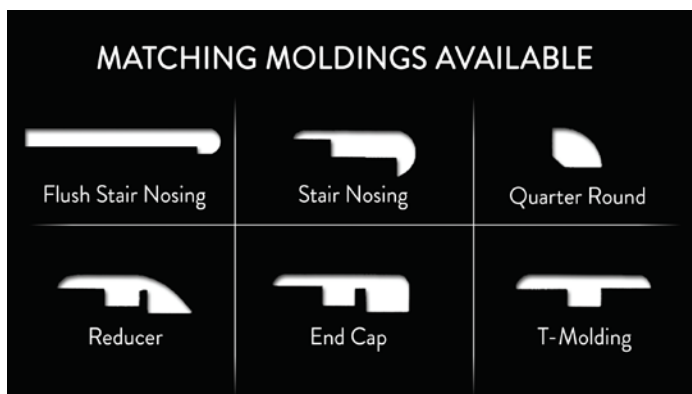

Product	Overall Thickness	5.0mm (No Pad)		
Dimensions	Width and Length	235mmW x 1522mmL		
Packaging (Per Carton)		5 Planks	19.25 Sq.Ft.	38.05 Lbs
Construction	Top Layers	High Definition Decor Film		
		Enhanced Polyurethane Coating		
		0.5mm Wear Layer		
	Core	3.0mm Limestone Composite: min. 70% stone, 0% wood, 100% Virgin Material		
	Density	1970kg/m³±10%		
	Pad	No pad		
	Bevel	Painted Bevel		
Installation	Floating			
Under Floor Heating	Approved - See installation manual for details.			
Warranty	50 Residential/10 Years Light Commercial			
Test Data				
Static Load	ASTM F970	1000PSI		
Heat Exposure Resistance F1700	ASTM F2199 EN16511	≤0.15%		
Swelling after submersion	NALFA LF 01-2011	0% Class 4, Heavy Commercial		
Impact Insulation Class	ASTM E492-09	IIC Rating = 54		
Castor Chair Resistance	ISO 4918	Pass		
Fire Rating	ASTM E648/ 662	Class I		
Wear Resistance	EN 13329 method A	Class 34, Heavy Commercial		
F1700	EN 16511	Class 34, Heavy Commercial		
Impact Resistance (Big Ball)	NALFA LF01-2011 EN 16511	Class 4, Heavy Commercial IC3, Class 34, Heavy Commercial		
Impact Resistance (Small Ball)	NALFA LF01-2011	Class 4, Heavy Commercial		
Static coefficient of Friction	ASTM D2047	Dry: 0.38, Wet: 0.9		
Resistance to staining F1700	ASTM F925 NALFA LF01-2011	Pass Class 4, Heavy Commercial		
Chemical Composition				
VOC	FloorScore™	Pass California		
Ortho-phthalates	Prop 65	Not Detected / In Compliance		
Lead	CPSIA	None Detected		
Substances of Very High Concern (SVHC) (Mercury, Chromium VI, Cadmium, SCCp, Benzene, Xylene, Tributyltin, etc.)		Not Detected		