

### Specifications

Construction: Vinyl, Composite Core,  
UV Coating + PVC Décor Film

Edge Type: Square Edge

Overall Thickness: 5.5mm

Wear Layer: 0.1mm (Residential Only)

Nominal Length: 48"

Nominal Width: 7"

Coverage per Carton: 37.82 ft<sup>2</sup> Pieces  
per Carton: 16

Weight per Carton: 54 lbs.

IIC=58 / STC=62

IIC=66 / STC=62 (with 1.5mm pad)

Installation Method: Floating

Underlayment Required: Yes



This product is protected by a 15  
year residential warranty



This floor is waterproof and won't be  
affected by household spills

### Features

- |                                                       |                                                      |
|-------------------------------------------------------|------------------------------------------------------|
| <input checked="" type="checkbox"/> UV Resistant      | <input checked="" type="checkbox"/> Fade Resistant   |
| <input checked="" type="checkbox"/> Fire Resistant    | <input checked="" type="checkbox"/> Hypoallergenic   |
| <input checked="" type="checkbox"/> Scratch Resistant | <input checked="" type="checkbox"/> Non Toxic        |
| <input checked="" type="checkbox"/> Slip Resistant    | <input checked="" type="checkbox"/> Mildew Resistant |
| <input checked="" type="checkbox"/> Stain Resistant   | <input checked="" type="checkbox"/> Easy Maintenance |


### Recommended Underlayment

- **VersaPro** 1.0mm Black / Green Underlayment
- **VersaPro PLUS** 1.5mm Black / Green Underlayment
- **WPCZS** 1.5mm Zero Slip High Density Black / Blue Underlayment
- **RUBBER Enhanced** 2mm Acoustical Silver / Green Underlayment

### Certifications

	<p>GREENGUARD Certification ensures that a product has met some of the world's most rigorous and comprehensive standards for low emissions of volatile organic compounds (VOCs) into indoor air.</p>
	<p>FloorScore® is the most recognized indoor air quality (IAQ) certification standard for hard surface flooring materials, adhesives, and underlayments.</p>

### Accessories

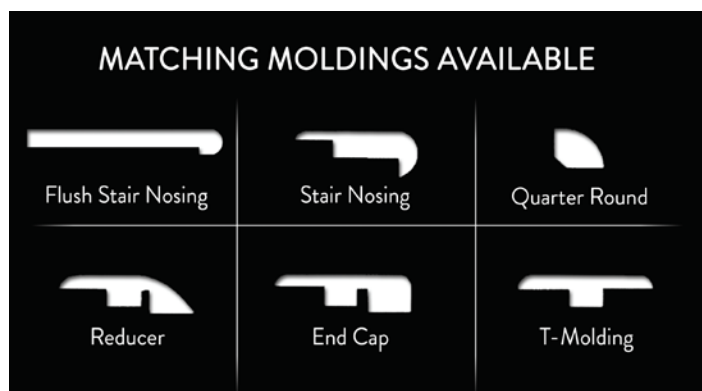

PRODUCT SPECIFICATIONS				
Product	Overall Thickness	5.5mm (No Pad)		
Dimensions	Width and Length	180mmW x 1220mmL		
Packaging (Per Carton)		16 Planks	37.82 Sq.Ft.	54.25 Lbs
Construction	Top Layers	High Definition Decor Film		
		Enhanced Polyurethane Coating		
		0.15mm Wear Layer RESIDENTIAL APPLICATION ONLY		
	Core	5.0mm Limestone Composite: min. 45% stone, 0% wood, 100% Virgin Material		
	Density	1220kg/m³±10%		
	Pad	No pad		
	Bevel	No Bevel		
Installation	Floating Glueless			
Under Floor Heating	Approved - See installation manual for details.			
Warranty	15 years residential			
Static Load	ASTM F970	500PSI		
Heat Exposure Resistance F1700	ASTM F2199 modified(70℃) EN16511 modified (70℃)	≤0.15%		
Swelling after submersion	NALFA LF 01-2011	0.2% Class 4,		
Impact Insulation Class	ASTM E492-09	IIC=58 / STC=62 With 1.5mm pad: IIC=66 / STC=62		
Castor Chair Resistance	ISO 4918	Pass		
Fire Rating	ASTM E648/ 662	Class I		
Wear Resistance	EN 13329 method A	Class 21,		
F1700	EN 16511	Class 21,		
Impact Resistance (Big Ball)	NALFA LF01-2011 EN 16511			
Impact Resistance (Small Ball)	NALFA LF01-2011			
Static coefficient of Friction	ASTM D2047	Dry: 0.5, Wet: 0.65		
Resistance to staining F1700	ASTM F925 NALFA LF01-2011	Pass Class 4,		
Chemical Composition				
VOC	FloorScore™	Pass California		
Ortho-phthalates	Prop 65	Not Detected / In Compliance		
Lead	CPSIA	None Detected		
Substances of Very High Concern (SVHC) (Mercury, Chromium VI, Cadmium, SCCp, Benzene, Xylene, Tributyltin, etc.)		Not Detected		