

Specifications

Construction: Vinyl, Composite Core, 1.5mm Cork Backer, UV Coating + PVC Décor Film

Edge Type: Micro Beveled

Overall Thickness: 8.5mm

Wear Layer: 0.5mm (20mil)

Nominal Length: 72"

Nominal Width: 8-7/8"

Coverage per Carton: 26.59 ft²

Pieces per Carton: 6

Weight per Carton: 48 lbs.

Installation Method: Floating +

Valinge 5G Drop Click

Recommended Usage: Residential & Light Commercial

Underlayment Required: No



This product is protected by a 50 year residential/10 year light commercial warranty



This floor is waterproof and won't be affected by household spills

Features

- | | |
|---|--|
| <input checked="" type="checkbox"/> UV Resistant | <input checked="" type="checkbox"/> Fade Resistant |
| <input checked="" type="checkbox"/> Fire Resistant | <input checked="" type="checkbox"/> Hypoallergenic |
| <input checked="" type="checkbox"/> Scratch Resistant | <input checked="" type="checkbox"/> Non Toxic |
| <input checked="" type="checkbox"/> Slip Resistant | <input checked="" type="checkbox"/> Mildew Resistant |
| <input checked="" type="checkbox"/> Stain Resistant | <input checked="" type="checkbox"/> Easy Maintenance |


Recommended Underlayment

- 6 MIL Plastic Vapor Barrier

Certifications

	<p>GREENGUARD Certification ensures that a product has met some of the world's most rigorous and comprehensive standards for low emissions of volatile organic compounds (VOCs) into indoor air.</p>
	<p>FloorScore® is the most recognized indoor air quality (IAQ) certification standard for hard surface flooring materials, adhesives, and underlayments.</p>

Accessories

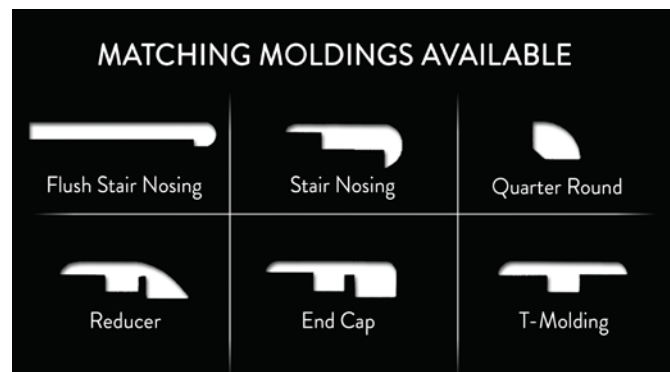

Product	Overall Thickness	8.5mm (2.0mm lvt+5.0mm wpc+1.5mm cork)		
Dimensions	Width and Length	225mm W x 1830mmL		
Packaging (Per Carton)		6 Planks	26.59 Sq.Ft.	48 Lbs
Construction	Top Layers	High Definition Decor Film		
		Enhanced Polyurethane Coating		
		0.5mm Wear Layer		
	Core	5.0mm Limestone Composite: min. 45% stone, 0% wood,		
		100% Virgin Material		
	Density	1120kg/m³±10%		
	Pad	1.5mm Cork		
Bevel	Micro Bevel			
Installation	Floating Glueless			
Under Floor Heating	Approved - See installation manual for details.			
Warranty	50 year Residential/10 Years Light Commercial			
Test Data				
Static Load	ASTM F970	350PSI		
Heat Exposure Resistance F1700	ASTM F2199 modified(70℃) EN16511 modified (70℃)	≤0.15%		
Swelling after submersion	NALFA LF 01-2011	0% Class 4, Heavy Commercial		
IIC & STC	ASTM E492 / ASTM E90	IIC=63 / STC=61		
Castor Chair Resistance	ISO 4918	Pass		
Fire Rating	ASTM E648/ 662	Class I		
Wear Resistance	EN 13329 method A	Class 34, Heavy Commercial		
F1700	EN 16511	Class 34, Heavy Commercial		
Impact Resistance (Big Ball)	NALFA LF01-2011 EN 16511	Class 4, Heavy Commercial IC3, Class 34, Heavy Commercial		
Impact Resistance (Small Ball)	NALFA LF01-2011	Class 4, Heavy Commercial		
Static coefficient of Friction	ASTM D2047	Dry: 0.38, Wet: 0.9		
Resistance to staining F1700	ASTM F925 NALFA LF01-2011	Pass Class 4, Heavy Commercial		
VOC	FloorScore™	Pass		
Ortho-phthalates	Prop 65	Not Detected / In Compliance		
Lead	CPSIA	None Detected		
Substances of Very High Concern (SVHC)		Not Detected		