

### Specifications

Construction: Rigid Core  
Stone Polymer Composite

Edge Type: Beveled

Overall Thickness: 5.5mm  
1.5mm XPE attached

Wear Layer: 20 MIL (0.05mm)

Nominal Length: 60"

Nominal Width: 9"

Coverage per Carton: 29.49 ft<sup>2</sup>

Pieces per Carton: 8

Weight per Carton: 49.96 lbs.

Installation Method: Floating

Recommended Usage: Residential &  
Light Commercial



This product is protected by a 30  
Year residential / 5 Year light  
commercial warranty



This floor is waterproof and won't be  
affected by household spills

### Features

The Spectrum XPE Collection Rigid Core SPC flooring is constructed with a high density thermo- plastic composite which is extremely stable and can be installed over most subfloors. Since there are no wood fibers, the Spectrum XPE Collection is 100% Waterproof and can be wet mopped. The Embossed in Register allows for an authentic natural wood look while the rigid core resists indentations and wear from everyday household traffic.


#### Recommended Underlayment

- 6MIL Plastic Vapor Barrier
- 2mm RUBBER Enhanced Acoustical Underlayment

### Technical Data

 <p>GREENGUARD PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS ULCOM/GG UL 2818</p>	<p>GREENGUARD Certification ensures that a product has met some of the world's most rigorous and comprehensive standards for low emissions of volatile organic compounds (VOCs) into indoor air.</p>
 <p>floor score CERTIFIED BY SCS Global Services</p>	<p>FloorScore® is the most recognized indoor air quality (IAQ) certification standard for hard surface flooring materials, adhesives, and underlayments.</p>

### Accessories

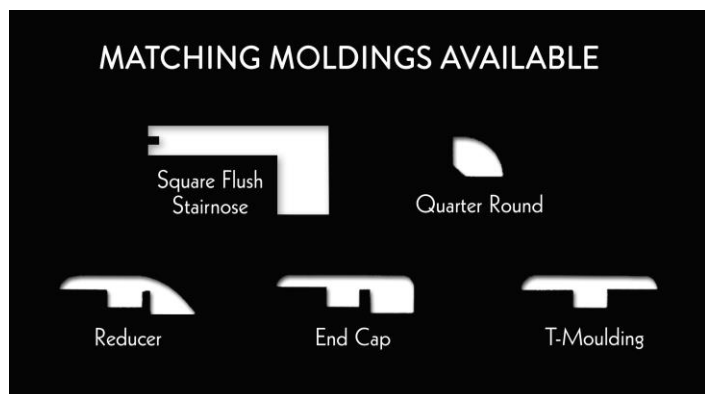

# SPECTRUM XPE COLLECTION

## RIGID CORE SPC FLOORING

Product	Overall Thickness	5.5mm (with 1.5mm XPE Pad)		
Dimensions	Width and Length	225mm W x 1522mm L		
Packaging (Per Carton)		8 Planks	29.49 Sq.Ft.	49.96 lbs.
Construction	Top Layers	High Definition Decor Film + EIR Enhanced Polyurethane Coating with Ceramic Bead 20 MIL Wear Layer		
	Core	3.5mm Limestone Composite: min. 65% stone, 0% wood, 100% Virgin Material		
	Density	1470kg/m³±10%		
	Pad	1.5mm XPE pad attached		
	Bevel	Painted Bevel		
Installation	Floating Glueless Click			
Under Floor Heating	Approved - See installation manual for details.			
Warranty	30 Years Residential / 5 Years Light Commercial See warranty guide for details.			
Test Data				
Static Load	ASTM F970	2000PSI		
Heat Exposure Resistance F1700(70°C/6h)	ASTM F2199 EN16511	≤0.10%		
Swelling after submersion	NALFA LF 01-2011	0% Class 4, Heavy Commercial		
Impact Insulation Class	ASTM E492-09	IIC Rating = 65		
Castor Chair Resistance	ISO 4918	Pass		
Fire Rating	ASTM E648/ 662	Class I		
Wear Resistance	EN 13329 method A	Class 34, Heavy Commercial		
F1700	EN 16511	Class 34, Heavy Commercial		
Impact Resistance (Big Ball)	NALFA LF01-2011 EN 16511	Class 4, Heavy Commercial IC3, Class 34, Heavy Commercial		
Impact Resistance (Small Ball)	NALFA LF01-2011	Class 4, Heavy Commercial		
Static coefficient of Friction	ASTM D2047	Dry: 0.38, Wet: 0.9		
Resistance to staining F1700	ASTM F925 NALFA LF01-2011	Pass Class 4, Heavy Commercial		
Chemical Composition				
VOC	FloorScore™	Pass		
Ortho-phthalates	Prop 65	Not Detected / In Compliance		
Lead	CPSIA	None Detected		
Substances of Very High Concern (SVHC) (Mercury, Chromium VI, Cadmium, SCCp, Benzene, Xylene, Tributyltin, etc.)		Not Detected		