

Specifications:

Construction: Rigid Core Stone Polymer Composite

Edge Type: Micro-Beveled

Overall Thickness: 5.5mm
1.5mm XPE Acoustical Pad Attached

Wear Layer: 20 MIL (0.05mm) + Ceramic Bead Finish

Nominal Length: 48" x Width: 7"

Coverage per Carton:
28.37sft. = ETG770 & ETG771
23.64sft. = ETG772,773,774,775

Pieces per Carton:
12 Planks (ETG770 & ETG771)
10 Planks (ETG772,773,774,775)

Weight per Carton: 48 lbs.

Installation Method: Floating

Recommended Usage: Residential & Light Commercial



This product is protected by a 25 Year residential / 5 Year light commercial warranty



This floor is waterproof and won't be affected by household spills


Features:

The Grand Heritage XPE Collection Rigid Core SPC is constructed with a high density thermo- plastic composite which is extremely stable and can be installed over most sub floors. Since there are no wood fibers, the Grand Heritage XPE Collection is 100% Waterproof and can be wet mopped. The natural embossing allows for an authentic natural wood look while the rigidity of the core resists indentations and wear from everyday household traffic.


Recommended Underlayment:

- **EssentiaLAY 2mm RUBBER Enhanced Acoustical & Vapor Underlayment**
- 6MIL Vapor Barrier

Technical Data:

 <p>GREENGUARD PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL COM/GG UL 2818</p>	<p>GREENGUARD Certification ensures that a product has met some of the world's most rigorous and comprehensive standards for low emissions of volatile organic compounds (VOCs) into indoor air. <i>(ETG770+ETG771 Certified)</i></p>
 <p>floor score CERTIFIED BY SCS Global Services</p>	<p>FloorScore® is the most recognized indoor air quality (IAQ) certification standard for hard surface flooring materials, adhesives, and underlayments.</p>

Accessories

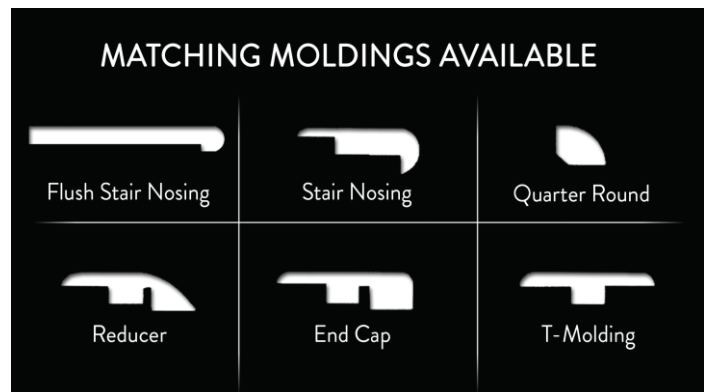

Product	Overall Thickness	5.5mm (with 1.5mm XPE Acoustical Pad Attached)
Dimensions	Width and Length	180mm W x 1220mm L
Packaging (Per Carton)	Refer to Page 1	28.37sft./23.64sft. Refer to Page 1
		48 lbs.
Construction	Top Layers	High Definition Decor Film Enhanced Polyurethane Coating with Ceramic Bead 20 MIL Wear Layer
	Core	3.7mm Limestone Composite: min. 64% stone, 0% wood, 100% Virgin Material
	Density	1900kg/m ³ ±10%
	Pad	1.5mm XPE Acoustical Pad Attached
	Bevel	Micro-Beveled
Installation	Floating - Glueless Click	
Under Floor Heating	Approved - See installation manual for details.	
Warranty	25 Years Residential / 5 Years Light Commercial See warranty guide for details.	
Test Data		
Static Load	ASTM F970	2000PSI
Heat Exposure Resistance F1700(70°C/6h)	ASTM F2199 EN16511	≤0.10%
Swelling after submersion	NALFA LF 01-2011	0% Class 4, Heavy Commercial
IIC & STC	ASTM E492 / ASTM E90	IIC Rating = 65 / STC = 61
Castor Chair Resistance	ISO 4918	Pass
Fire Rating	ASTM E648/ 662	Class I
Wear Resistance	EN 13329 method A	Class 33, Heavy Commercial
F1700	EN 16511	Class 34, Heavy Commercial
Impact Resistance (Big Ball)	NALFA LF01-2011 EN 16511	Class 4, Heavy Commercial IC3, Class 34, Heavy Commercial
Impact Resistance (Small Ball)	NALFA LF01-2011	Class 4, Heavy Commercial
Static coefficient of Friction	ASTM D2047	Dry: 0.38, Wet: 0.9
Resistance to staining F1700	ASTM F925 NALFA LF01-2011	Pass Class 4, Heavy Commercial
Chemical Composition		
VOC	FloorScore™	Pass California 01350
Ortho-phthalates	Prop 65	Not Detected / In Compliance
Lead	CPSIA	None Detected
Substances of Very High Concern (SVHC) (Mercury, Chromium VI, Cadmium, SCCp, Benzene, Xylene, Tributyltin, etc.)		Not Detected