

### Specifications:

**Construction:** Rigid Core Stone Polymer Composite

**Edge Type:** Micro-Beveled

**Overall Thickness:** 5.0mm

1.0mm XPE Pad Attached

**Wear Layer:** 12 MIL (0.03mm)

**Nominal Length:** 48"

**Nominal Width:** 7"

**Coverage per Carton:** 23.64sft.

**Pieces per Carton:** <sup>10</sup>

**Weight per Carton:** approx. 48 lbs.

**Installation Method:** Floating

**Recommended Usage:** Residential & Light Commercial



This product is protected by a  
20 Year Residential  
5 Year Light Commercial warranty



READY+LOCK+GO Series SPC is 100%  
Waterproof and won't be affected  
by household spills


### Features:

Featuring the World's Easiest Flooring Installation System, the READY+LOCK+GO Series Rigid Core SPC installs 30% faster than other SPC flooring and it is constructed with a High Density Thermo-Plastic Composite core which is extremely stable and can be installed over most subfloors. Since there are no wood fibers, the READY+LOCK+GO Series is 100% Waterproof and can be wet mopped. The natural embossing allows for an authentic natural wood look while the rigid core resists indentations and wear from everyday household traffic.

### Recommended Underlayment:

- EssentialLAY 2mm RUBBER Enhanced Acoustical & Vapor Underlayment
- 6MIL Vapor Barrier


### Technical Data:

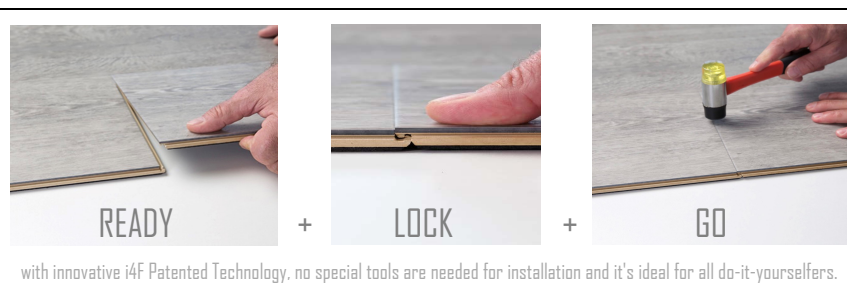

FloorScore® is the most recognized indoor air quality (IAQ) certification standard for hard surface flooring materials, adhesives, and underlayments.

### Accessories:

#### MATCHING MOLDINGS AVAILABLE

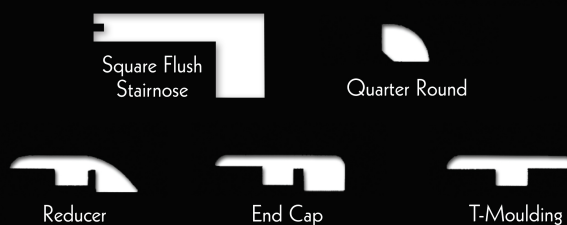

Product:	Overall Thickness	5.0mm (with 1.0mm XPE Acoustical Pad Attached)		
Dimensions:	Nominal Width and Length	180mm W x 1220mm L		
Packaging: (Per Carton)		10 Planks	23.64sf/box	approx. 48 lbs.
Construction:	Top Layers	High Definition Decor Film Enhanced UV Polyurethane Coating 12 MIL Wear Layer		
	Core	3.7mm Limestone Composite: min. 64% stone, 0% wood, 100% Virgin Material		
	Density	1900kg/m³±10%		
	Pad	1.0mm XPE Pad Attached		
	Bevel	Micro-Beveled		
Installation	Floating - Glueless Click			
Under Floor Heating	Approved - See installation manual for details.			
Warranty	20 Years Residential / 5 Years Light Commercial See warranty guide for details.			
Test Data				
Static Load	ASTM F970	2,000PSI		
Heat Exposure Resistance F1700(70°C/6h)	ASTM F2199 EN16511	≤0.10%		
Swelling after submersion	NALFA LF 01-2011	0% Class 4, Heavy Commercial		
IIC & STC	ASTM E492 / ASTM E90	IIC Rating = 53 / STC = 53		
Castor Chair Resistance	ISO 4918	Pass		
Fire Rating	ASTM E648/ 662	Class I		
Wear Resistance	EN 13329 method A	Class 33, Heavy Commercial		
F1700	EN 16511	Class 34, Heavy Commercial		
Impact Resistance (Big Ball)	NALFA LF01-2011 EN 16511	Class 4, Heavy Commercial IC3, Class 34, Heavy Commercial		
Impact Resistance (Small Ball)	NALFA LF01-2011	Class 4, Heavy Commercial		
Static coefficient of Friction	ASTM D2047	Dry: 0.38, Wet: 0.9		
Resistance to staining F1700	ASTM F925 NALFA LF01-2011	Pass Class 4, Heavy Commercial		
Chemical Composition				
VOC	FloorScore™	Pass California 01350		
Ortho-phthalates	Prop 65	Not Detected / In Compliance		
Lead	CPSIA	None Detected		
Substances of Very High Concern (SVHC) (Mercury, Chromium VI, Cadmium, SCCp, Benzene, Xylene, Tributyltin, etc.)		Not Detected		